
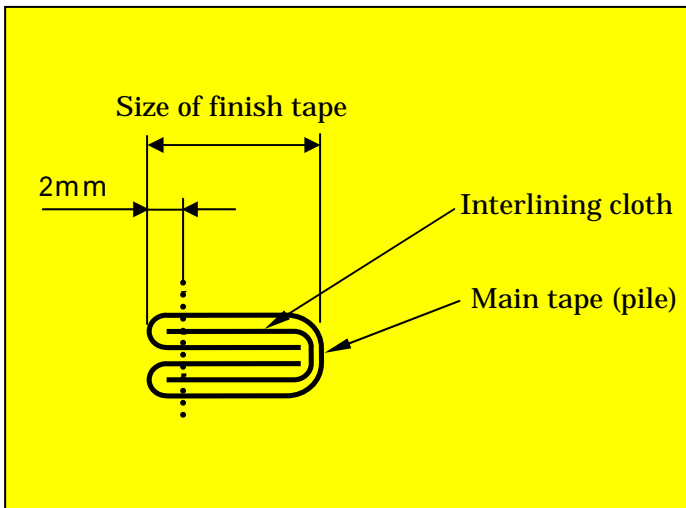


MHA - PIN

WIRE TUBE PIPING SEWING MACHINE

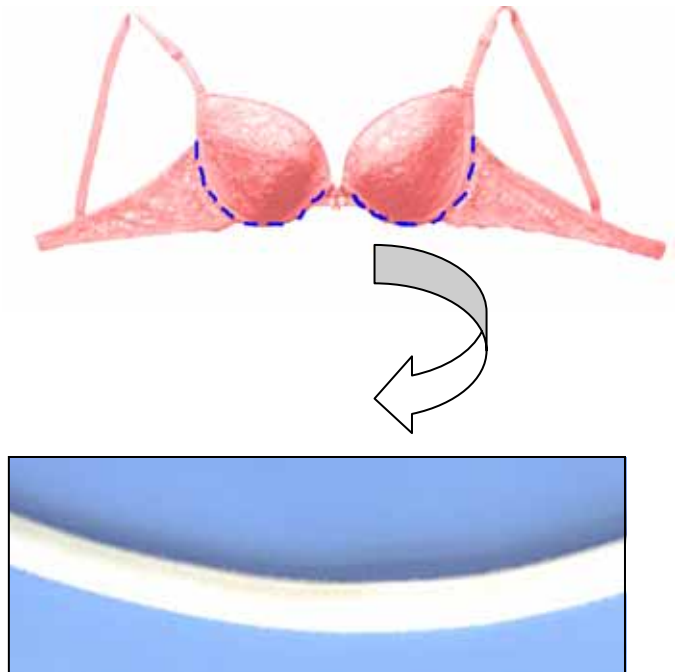

59-2 Nishiakeda-cho, Higashikujo, Minami-ku, Kyoto 601-8045 Japan

Phone: +81-75-661-1134 Fax: +81-75-681-0908

E-mail: info@hams-jp.com URL: <http://www.hams-jp.com/>

Specifications

| | |
|--------------------------|--|
| Model | MHA-PIN (WIRE TUBE PIPING SEWING MACHINE) |
| Machine head | YAMATO VF2503-156M-21 High-speed, flat bed double ring needleworksewing machine |
| Voltage | 200V ~ 240V 3-phase 50 / 60Hz 200V ~ 240V 1-phase 50 / 60Hz (according to customer's requirement) |
| Sewing speed | 5000rpm |
| Rated current | 3.0A |
| Max stitching length | 3.6mm |
| Width of tape | The machine include one type of gauge (According to customer's specifications) |
| Control | Sequence Control |
| Needlework specification | Exchangeable binder type |
| Incidental device | Tape stand |
| | Binder |
| | Thread running-out detector |
| | Feed Puller |
| | Meter Counter |
| Dimensions | (W)1200 × (D)525 × (H)1200mm. |
| 【× ㊦】 | |